





Unitsolutions
умная AV-интеграция

CleverMic SP22 BT

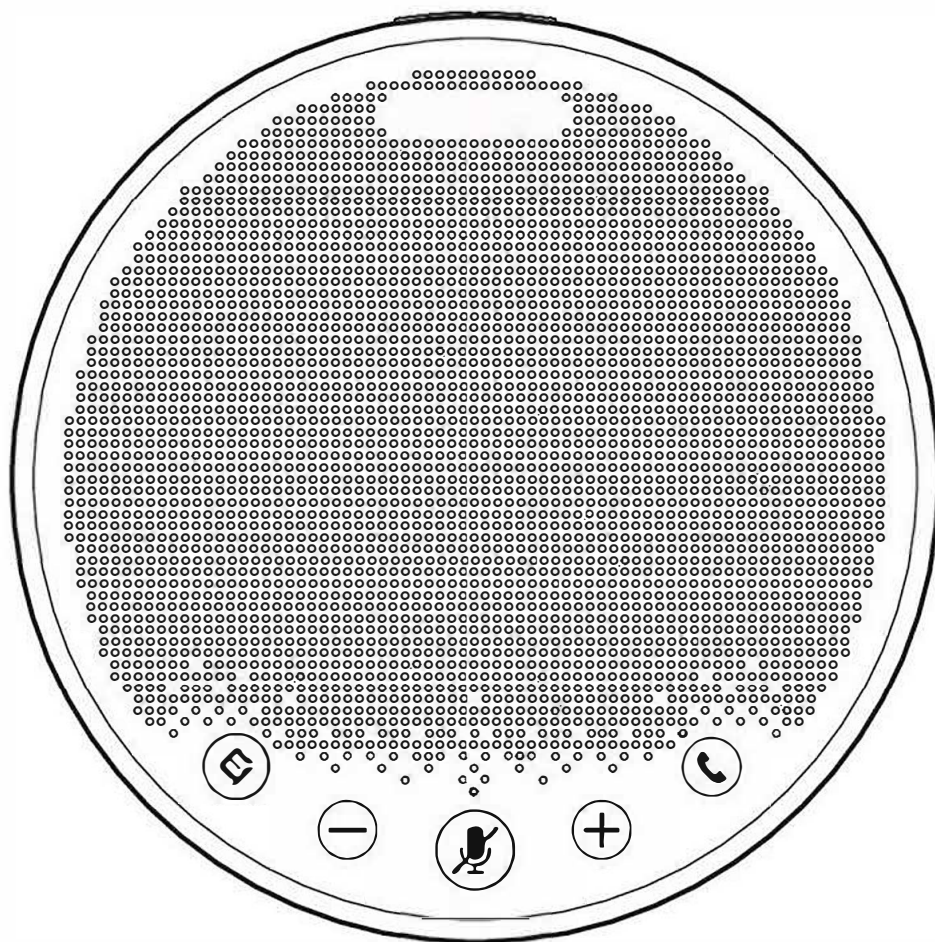

User Manual


Overview

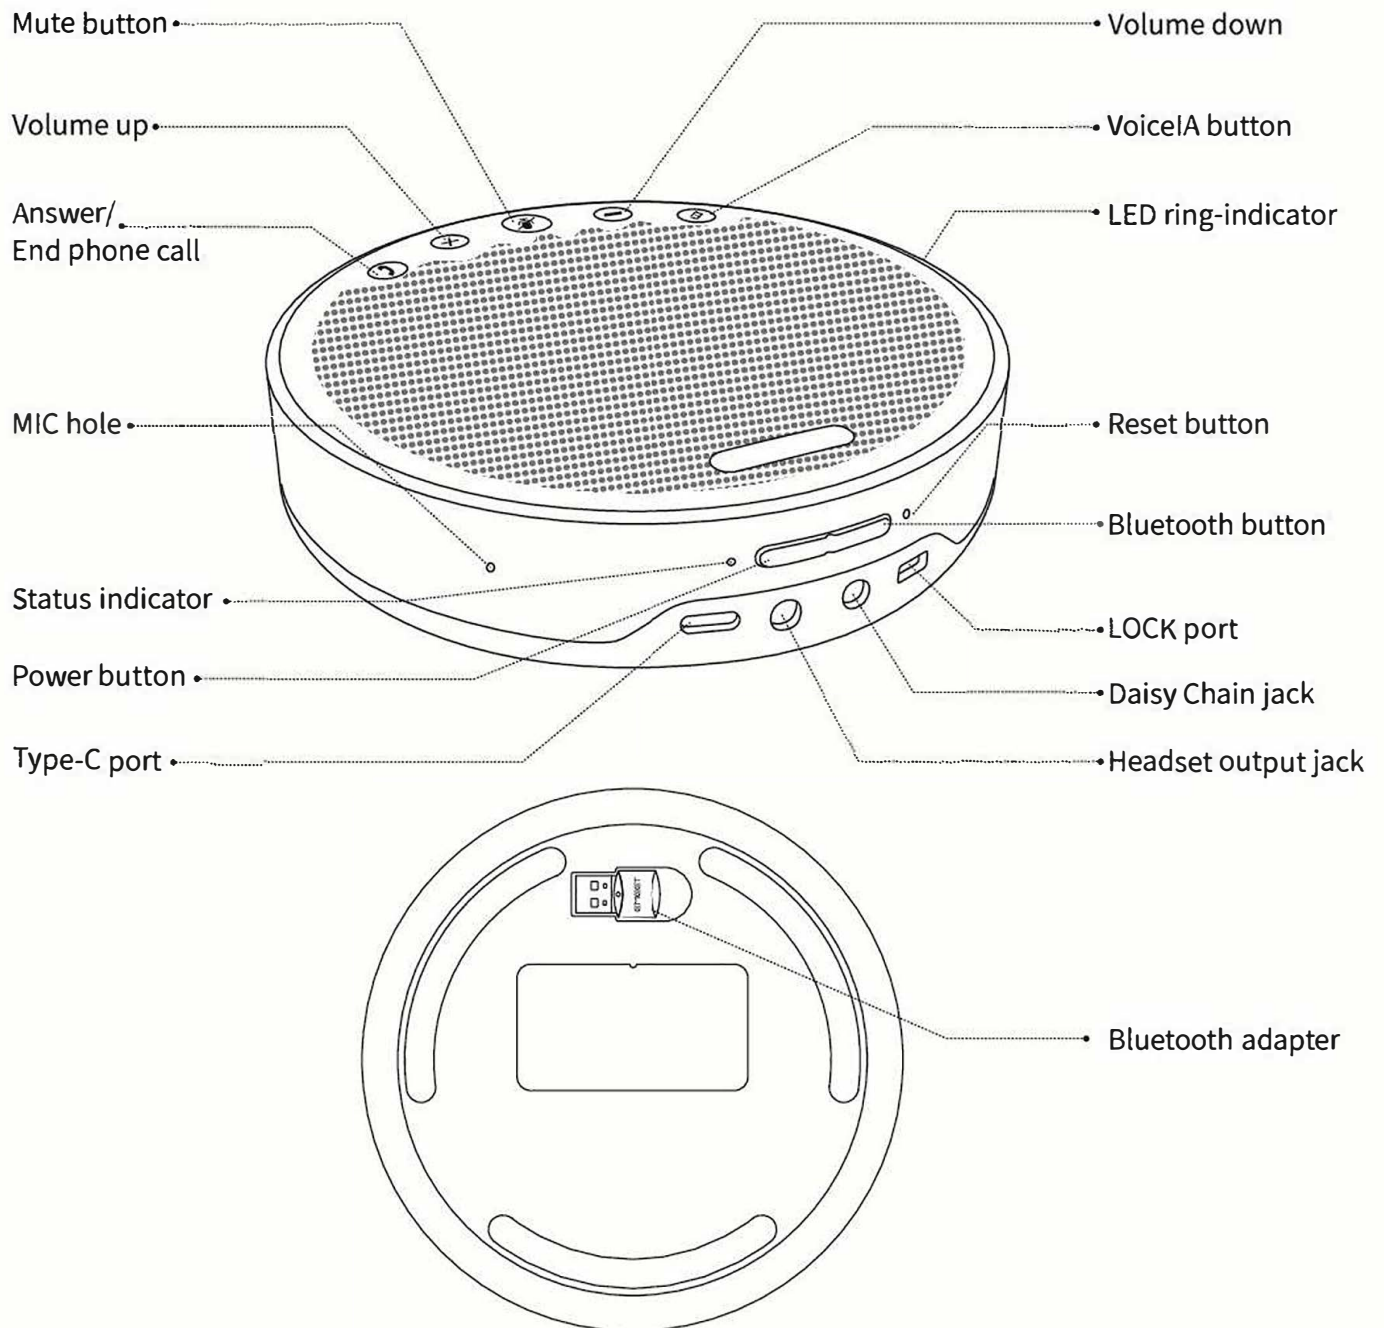

Power on/off


Power on/off

- Press and hold the power button -- power on/off

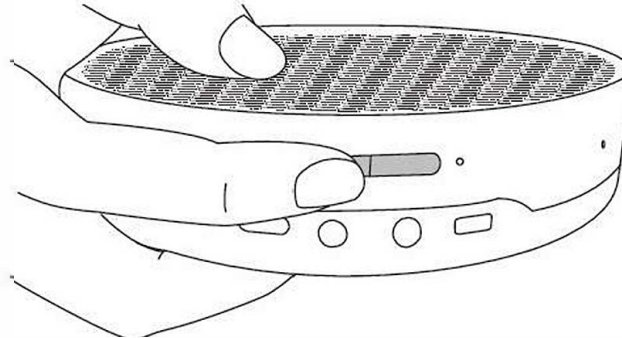


Check battery level

- Short press the power button when powered on -- the LED ring-indicator indicates the battery level

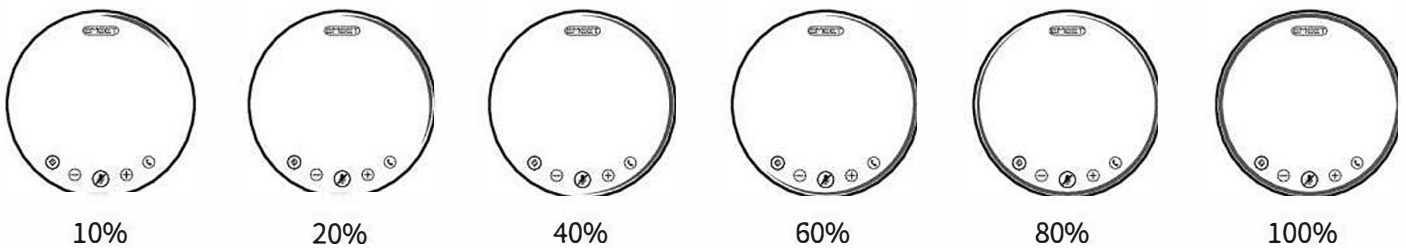



Low battery warning

- In power on state, the LED ring-indicator turns red.

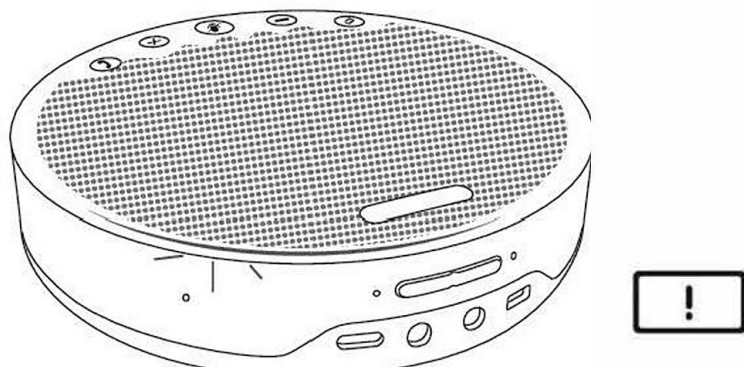


VoicelA Button

- VoicelA is a noise-cancelling algorithm.
- Short press -- turn on/off VoicelA intelligent noise reduction
- Turning on VoicelA noise reduction can greatly reduce some noises during meetings, such as from keyboard tapping, air conditioning noise, and general unwanted background noise.

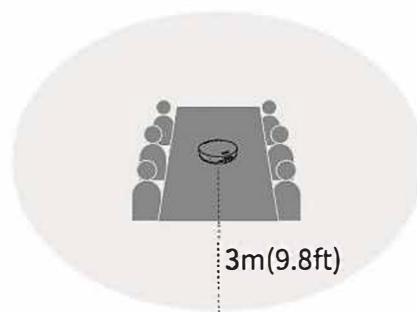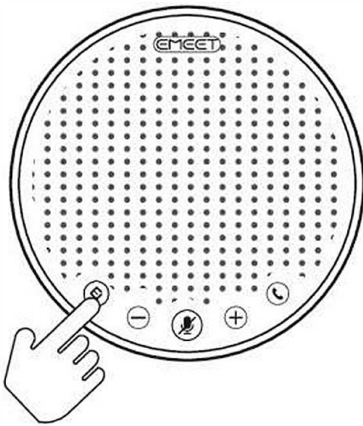


VoicelA Off

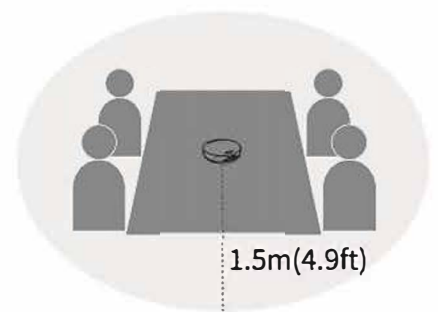


VoicelA On

MIC Mute Button

- Press -- mute/unmute MIC
- When the MIC is muted, the LED ring-indicator turns red.

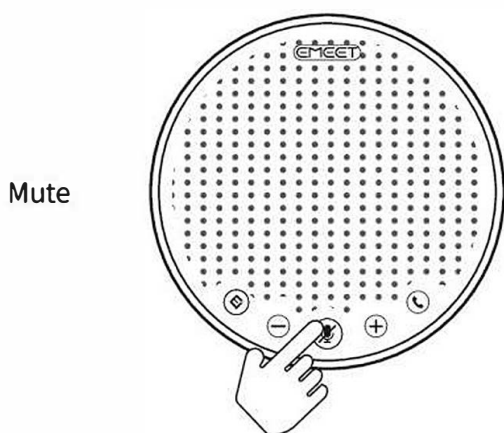


Mute

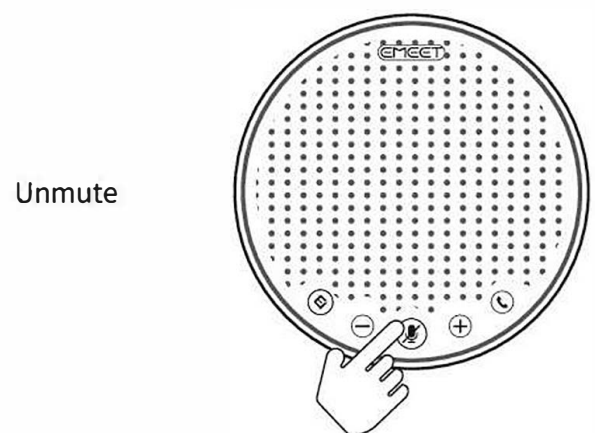

Unmute

Answer/End Phone Call Button

- Incoming call -- press -- answer a call
- Incoming call -- press and hold -- reject a call
- Call going -- press/press and hold -- end a call

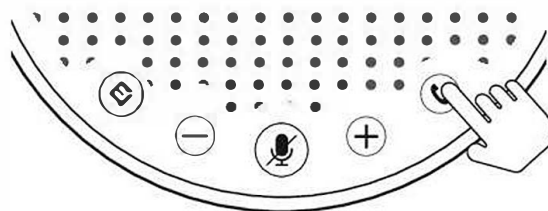

Volume+/Volume- Button

Volume+

- Press -- volume+ -- volume up -- LED ring-indicator turns blue



10%



20%



40%

Volume-

- Short press -- volume- -- volume down -- the LED ring-indicator turns blue



60%



80%



100%

Bluetooth Connection

Bluetooth pairing

- Press and hold the Bluetooth button -- Enter Bluetooth pairing mode -- Bluetooth paired -- the Status indicator remains steady blue
- Bluetooth not paired -- the Status indicator flashes blue

Bluetooth turned off


- Short press the Bluetooth button -- Bluetooth turned off -- the Status indicator remains steady white

Bluetooth reconnected

- Bluetooth disconnected -- Press Bluetooth button -- Bluetooth reconnected


Note:

- When the product is turned on, it will reconnect to the last successfully connected device via Bluetooth (if enabled on the device).
- Bluetooth turned off means it can not be found.

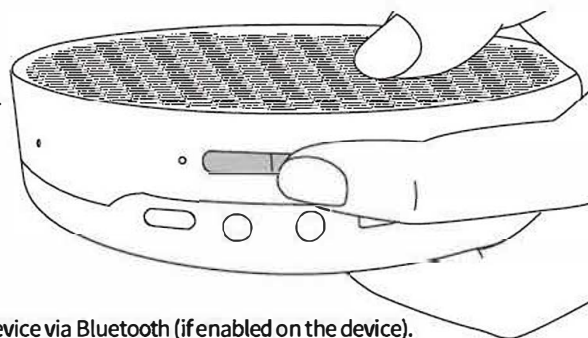


USB Connection

- Connect to your computer by using a USB cable.

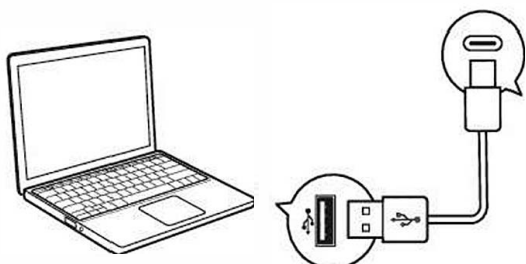


- The Status indicator turns green when the USB cable is connected.

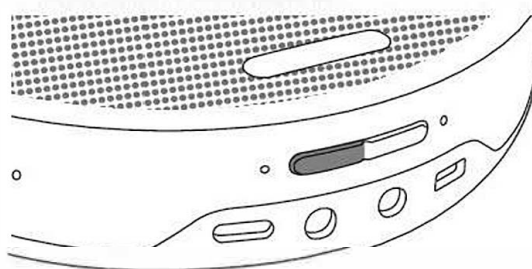

Bluetooth Dongle Connection

- Connect to your computer by using a USB Dongle. Plug-and-play is supported when the device is on.
- When the Bluetooth dongle is connected, the Status indicator turns blue.

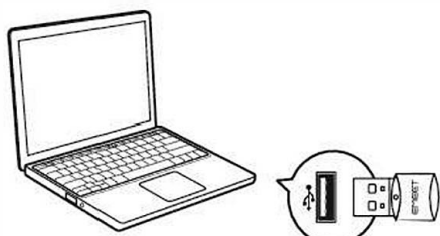


Status	Bluetooth dongle indicator
During pairing	Flashes blue rapidly
Pairing successful	Steady blue
Reconnection	Flashes blue slowly
Skype for business incoming call	Flashes green
Call going	Steady green
Mute	Steady red
Low battery alarm	Flashes red rapidly

Headset Connection

- Connect to the headset jack using a 3.5mm headset cable.
- When the headset is connected, the Status indicator turns yellow (not connected to Bluetooth or USB cable).

Note:


When the headset is connected, the speaker is automatically muted.

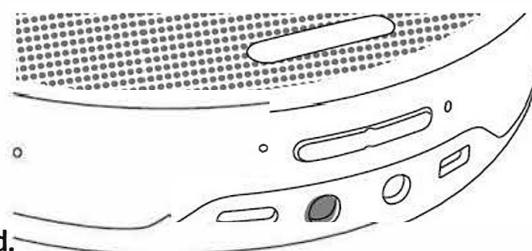


Daisy Chain Cable

- Daisy-Chain can be carried out by connecting the LINK ports of two products using a Daisy Chain cable.
- The Status indicator turns ice blue when Daisy Chain is connected.

Note: EMEET DaisyChain cables must be purchased separately.

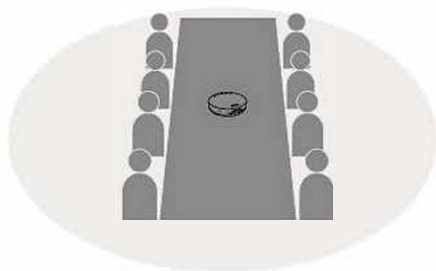

Support meetings of 8 people before daisy-chain.

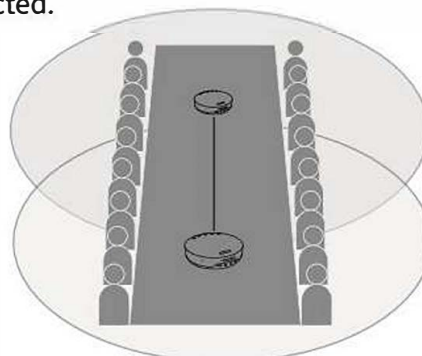


Support meetings of 16 people after daisy-chain.

Lock Port Setting

- Lock the product through the LOCK port to prevent theft.

Note: The LOCK port is of a Kensington type which requires the users to buy a lock otherwise.

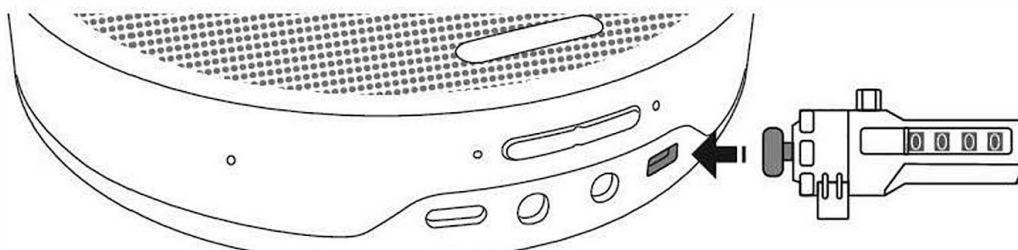

Charging

Action	Status indicator	Indication
Charging in power-off state	Flashes yellow	
Fully charged in power-off state	Steady yellow	

Product Parameters

Note: If the specifications are changed, please refer to the official website information.

Charging input	5V $\mp$ 2A
Output rating	5W
Charging time	4~5H
Speaker frequency range	20Hz~20KHz
Bluetooth version	V5.0
Bluetooth range	20m (in an open environment)
Product size	135*135*35mm

Contact Us

Official website: <https://unitsolutions.ru/>